


LE2711 NEW

- Apply to the floor, integrated into architecture
- Ultra-thin design, suitable for indoor floor, outline & decorating
- AL6063-T5 aluminum profile with high-quality surface treatment
- Close-fitting design without screw, make installation more convenient

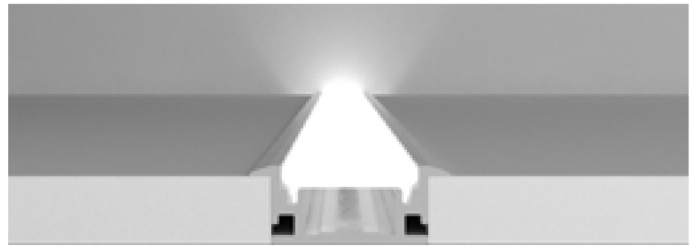

Basic Parameters

Profile material AL6063-T5

Surface processing Anodizing

Diffuser material PC

Transmittance >75%


Profile Components

Profile×1 L2500×W271×H11mm

Diffuser×1 L2500×W19×H5mm

End cap×2 EC-LE2711FXS L27×W11×H10mm

End cap with hole×2 EC-LE2711FXD L27×W11×H10mm

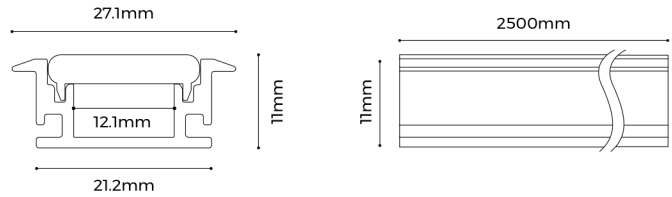


Lighting Source

Flexible Strip^①

Model	CRI	Lumens ^②	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8168-24V-10mm	>80 >95	2025LM/M 1586LM/M	24V	16.2W/M	5000x10x1.6mm	168LEDs	42mm/7LEDs



- ① Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
 ② The luminous flux is the testing result of 4000K product.

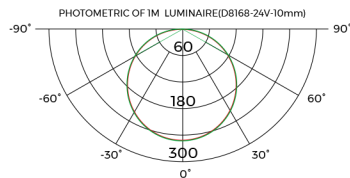

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Package	Label Type							
ALS	-	Floor Lighting	LE 2711	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	COLORS Whole	B	COLORS	C
								Single end with hole	H			Customized	S						
								Double end with hole	D										
ALS	-		LE 2711	F		D	X	S	S	2500	-	B	C						

Ordering profile components

ALS-LE2711FDXSS2500-BC

