

# LG2727 NEW

- Apply to outer corner of wall edges and integrated into the wall by embedded design
- Only 10mm luminous surface outlining the decorative effects in a slim and exquisite manner
- AL6063-T5 aluminum profile with high-quality surface treatment
- Close-fitting design without screw, make installation more convenient



## Basic Parameters


Profile material	AL6063-T5
Surface processing	Anodizing
Diffuser material	PC
Transmittance	>70%

## Profile Components

Profile×1	L2500×W50×H22.3mm	
Diffuser×1	L2500×W11×H4.6mm	
End cap×2	EC-LG2727FXS L22.1×W15×H7mm	
End cap with hole×2	EC-LG2727FXD L22.1×W15×H7mm	

## Installation Accessories


Screw	CL-01 M3.5×40mm	
-------	--------------------	--

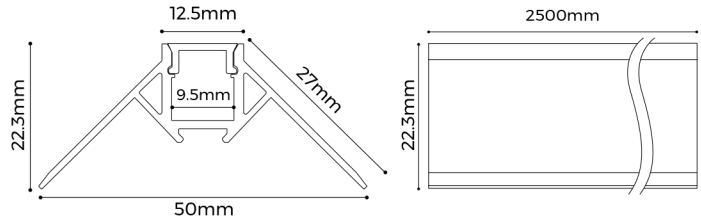


## Lighting Source

### Flexible Strip<sup>①</sup>

Model	CRI	Lumens <sup>②</sup>	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8120-24V-8mm	>80 >95	1499LM/M 1143LM/M	24V	13.5W/M	5000x8x1.6mm	120LEDs	50mm/6LEDs
D6120-24V-8mm	>90	710LM/M	24V	8.6W/M	5000x8x1.2mm	120LEDs	50mm/6LEDs



- ① Recommended light source, to ensure the best heat dissipation / lighting effect / life span.  
 ② The luminous flux is the testing result of 4000K product.

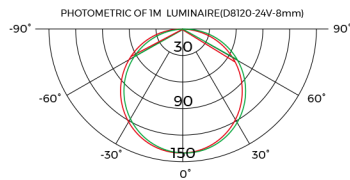

## Ordering Code

Category	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Package	Label Type								
ALS	Corner Lighting	LG 2727	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	COLORS Whole	B	COLORS	C
											Single end with hole	H					Customized	S
											Double end with hole	D						
ALS	-	LG 2727	F	D	X	S	S	2500	-	B	C							

Ordering profile components

ALS-LG2727FDXSS2500-BC

