


LG8513

- Apply to skirting board , integrated into architecture
- Indirect lighting design
- AL6063-T5 aluminum profile with high-quality surface treatment, white and silver are optional
- Easy installation and free connection



Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Anodizing <input checked="" type="radio"/>
Diffuser material	PC
Transmittance	>70%

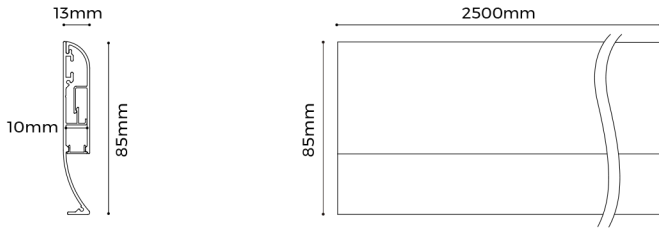


Profile Components	
ProfileX1	L2500XW13XH85mm
DiffuserX1	L2500XW10XH4.1mm
End capX2	EC-LG8513FSS L85XW13XH1.5mm

Installation Accessories	
Screw	CL-01 M3.5X20mm

Lighting Source

Flexible Strip ^①							
Model	CRI	Lumens ^②	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8120-24V-8mm	>80 >95	1499LM/M 1143LM/M	24V	13.5W/M	5000x8x1.6mm	120LEDs	50mm/6LEDs
D6120-24V-8mm	>90	710LM/M	24V	8.6W/M	5000x8x1.2mm	120LEDs	50mm/6LEDs

- ① Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
② The luminous flux is the testing result of 4000K product.

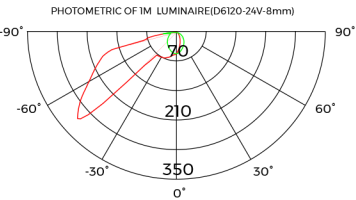

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Package	Label Type								
ALS	-	Skirting Board Lighting	LG	8513	Flat	F	Diffuser	D	No carrier	X	Silver	S	Holeless end cap	S	2500	-	COLORS Whole	B	COLORS	C
											White	W								
ALS	-		LG	8513		F		D		X		S		S	2500	-		B		C

Ordering profile components

ALS-LG8513FDXSS2500-BC

Floor Lighting

Floor lighting can be widely used for sidewalks, bicycle lanes, parking lots and bathrooms, perfectly outline structure, create thousands of stylings with good resistance of water, humidity and crush.