

# LS0510

- Ultimate slim with 3.4mm luminous surface
- Flexible in a variety of narrow spaces for outlining & decorating
- AL6063-T5 aluminum profile + silicone neon strip, making it extremely
- convenient to install and maintain the light source
- Applicable to indoor damp environments



## Basic Parameters

Profile material AL6063-T5

Surface processing Anodizing

LED Strip Silicone neon

IP grade IP54

## Profile

ProfileX1 L2500XW5XH10mm




## Lighting Source

Silicone neon strip

Model	CRI	Lumens <sup>①</sup>	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
NPS0409	>90	70LM/m	24V	5W/m	5000x4x9mm	140LEDs	50mm/7LEDs
NPS0409	>90	70LM/m	12V	6W/m	5000x4x9mm	150LEDs	20mm/3LEDs



①The luminous flux is the testing result of 4000K product.

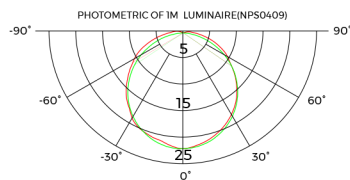

## Ordering Code

Category	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Package	Label Type
ALS	Gap Lighting	LS	OS10	No Diffuser	No Diffuser	No carrier	No end cap	2500	COLORS Whole	COLORS
ALS		LS	OS10	X	X	X	X	2500	B	Customized

Ordering profile components

ALS-LS0510XXXSX2500-BC

