


# SK10031 NEW

- Apply to skirting board , integrated into architecture
- 20M ultra-long flexible diffuser, more convenient installation
- Indirect lighting design
- AL6063-T5 aluminum profile with high-quality surface treatment, white and silver are optional




Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Anodizing <input checked="" type="radio"/>
Diffuser material	PC
Transmittance	>80%


Profile Components	
Profile×1	L2500×W31×H100mm 
Flexible diffuser×1	L20000×W14×H3mm 

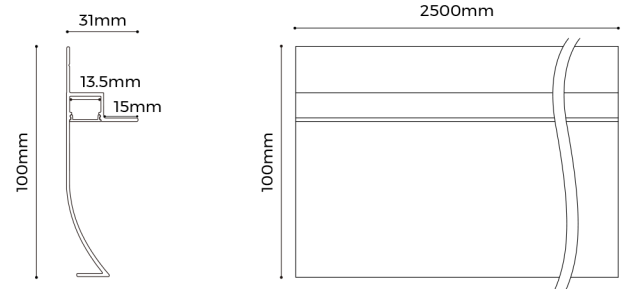

Lighting Source							
Flexible Strip <sup>①</sup>							
Model	CRI	Lumens <sup>②</sup>	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8120-24V-8mm	>80 >95	1499LM/M 1143LM/M	24V	13.5W/M	5000x8x1.6mm	120LEDs	50mm/6LEDs
D6120-24V-8mm	>90	710LM/M	24V	8.6W/M	5000x8x1.2mm	120LEDs	50mm/6LEDs

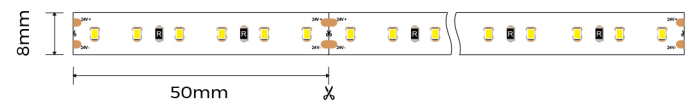

- ① Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
- ② The luminous flux is the testing result of 4000K product.

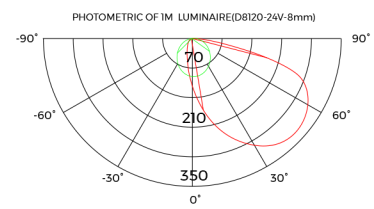

## Ordering Code

Category	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Package	Label Type
ALS	Skirting Board Lighting	SK 10031	No Diffuser X	No Diffuser X	No carrier X	Silver S White W	No end cap X	2500	COLORS Whole	COLORS C Customized S
ALS		SK 10031	X	X	X	S	X	2500	B	C

Ordering profile components