



SK10816 NEW

- Apply to skirting board , integrated into architecture
- 20M ultra-long flexible diffuser, more convenient installation
- AL6063-T5 aluminum profile with high-quality surface treatment, white and silver are optional

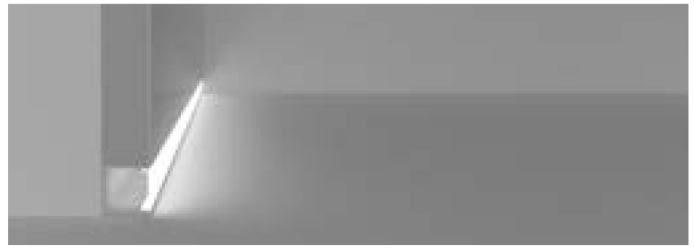


Basic Parameters	
Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Anodizing <input checked="" type="radio"/>
Diffuser material	PC
Transmittance	>80%


Profile Components	
Profile×1	L2500×W16.2×H108mm 
Flexible diffuser×1	L20000×W14×H03mm 

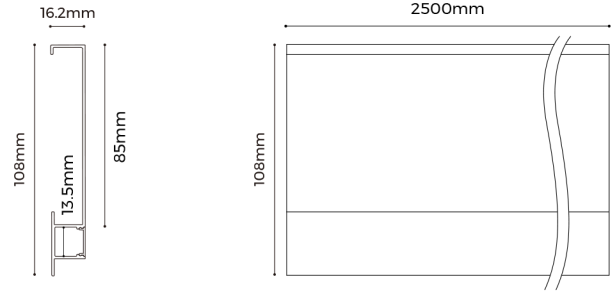

Lighting Source							
Flexible Strip①							
Model	CRI	Lumens②	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8120-24V-8mm	>80	1499LM/M	24V	13.5W/M	5000x8x1.6mm	120LEDs	50mm/6LEDs
	>95	1143LM/M					
D6120-24V-8mm	>90	710LM/M	24V	8.6W/M	5000x8x1.2mm	120LEDs	50mm/6LEDs



- ① Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
 ② The luminous flux is the testing result of 4000K product.

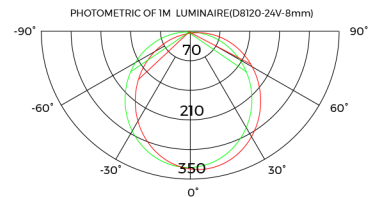

Ordering Code

Category	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Package	Label Type
ALS	Skirting Board Lighting	SK	10816	No Diffuser X	No Diffuser X	No carrier X	Silver S White W	No end cap X	2500	COLORS Whole B Customized S
ALS	-	SK	10816	X	X	X	S	X	2500	B C

Ordering profile components