

LG4343 NEW

- Apply to inner corner of wall edges and integrated into the wall by embedded design
- 20M ultra-long flexible diffuser, more convenient installation
- AL6063-T5 aluminum profile with high-quality surface treatment
- Close-fitting design without screw, make installation more convenient



Basic Parameters

Profile material AL6063-T5

Surface processing Anodizing

Diffuser material PC

Transmittance >80%

Profile Components

Profile×1 L2500×W43×H43mm



Flexible diffuser×1 L20000×W14×H3mm



End cap×2 EC-LG4343FXS
L15.2×W12.2×H7mm




End cap with hole×2 EC-LG4343FXD
L15.2×W12.2×H7mm



Installation Accessories


Screw CL-01
M3.5×40mm

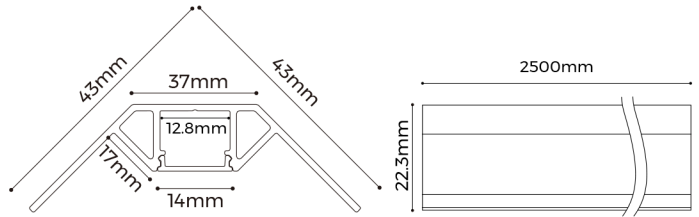


Lighting Source

Flexible Strip①

Model	CRI	Lumens②	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8120-24V-8mm	>80 >95	1499LM/M 1143LM/M	24V	13.5W/M	5000x8x1.6mm	120LEDs	50mm/6LEDs
D6120-24V-8mm	>90	710LM/M	24V	8.6W/M	5000x8x1.2mm	120LEDs	50mm/6LEDs



- ① Recommended light source, to ensure the best heat dissipation / lighting effect / life span.
② The luminous flux is the testing result of 4000K product.

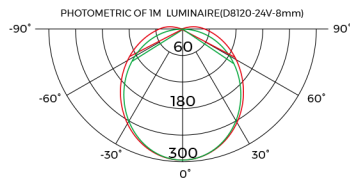

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Package	Label Type								
ALS	-	Corner Lighting	LG	4343	No Diffuser	X	No Diffuser	X	No carrier	X	Silver	S	Holeless end cap	S	2500	-	COLORS Whole	B	COLORS	C
													Single end with hole	H					Customized	S
													Double end with hole	D						
ALS	-		LG	4343		X		X		X		S		S	2500	-		B		C

Ordering profile components

ALS-LG4343XXXSS2500-BC

